




PRIMER FOR
BITUMEN
WATERPROOFING

BITUMEN PRIMER

2023

The Best Product

Priming Solution
High Performance
Make Your Buildings Dry

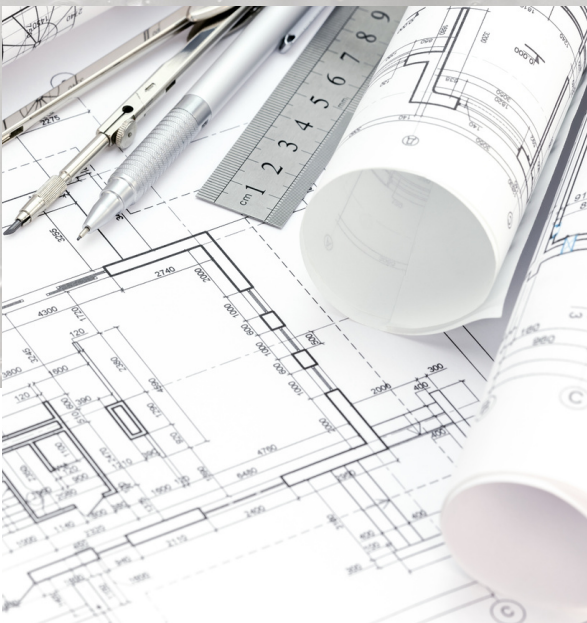

BITUMEN PRIMER

Application Information

Preparation

All surfaces should be sound, clean and DRY.
Apply a generous coat of Bitumen Primer using a brush or roller. Allow surface to dry fully before application of any additional coatings.

- For use on porous and non-porous surfaces
- Ready to use. Do not dilute.
- Do not apply on damp substrates.
- Using a flat paddle, mix well before use.
- All surfaces should be sound, clean and DRY.
- Apply bitumen primer using a brush or roller. Allow surface to dry fully before application of any additional coatings.

Mixing

Before use, ensure that the Bitumen Primer is thoroughly mixed into a homogeneous mix.

Spray Application

Use airless spray equipment for high viscous liquids with a feed pressure of 4 ~ bar.

Pressure at gun ~ 2.5 bar

Do not mix the product with other materials.

Brush / Roller Application

~0.20l/m² for typical concrete surfaces. The spread rate will vary according to the substrate porosity.

Limitations

Do not apply Bitumen primer whilst smoking or near naked flames.

Do not apply Bitumen primer during rain and should be applied in a ventilated area.

Protect coated area from rain, frost etc until dry



Product Description

One component, solvent - based bitumen priming and sealing solution

Benefits

- Ready to use
- Quick drying
- Applied by brush, roller, or airless spray.
- Deep penetration ability into concrete and mortar substrates.
- Excellent adhesion of solvent free bituminous coatings and membranes

Colour :	Black
Packaging :	5L&20L
Coverage :	4.5m² per L
Penetrating Depth:	2mm
Density :	~20% by vol.
Chemical Base:	Solvent Bitumen Based
Viscosity:	13-16 sec. ford 4 cup
Volatile organic compound content :	~80% by vol.
Substrate / Ambient air Temp.	+5°C min /+35°C max
Storage :	4 - hours
	Keep container unopened packaging. Dry Conditions
Shelf life :	12 months

Health and Safety

Avoid spillage onto patios, paths etc; flush away any spillage immediately using concentrated detergent solution.

Do not contaminate glass or aluminium; wipe off any material immediately.

For full safety information consult material data sheet - available on request.



Other information

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information



Address: APD Industrial Park
Cnr Elsecar & Bernie streets
Kya Sand
Johannesburg
2163



011 7083603



technical@safeguardchem.co.za



www.safeguardchem.co.za



[Safeguardchemicals](https://www.facebook.com/Safeguardchemicals)



[safeguardchemicals](https://www.instagram.com/safeguardchemicals)



[safeguard.chemicals](https://www.tiktok.com/safeguard.chemicals)



[safeguardchemicalssa2888](https://www.youtube.com/safeguardchemicalssa2888)



[safeguard.chemicals](https://www.linkedin.com/safeguard.chemicals)