




WATERPROOFING

BITUMEN PRIMER

2023

**The Best
Product**

Priming Solution
High Performance
Make Your Buildings Dry

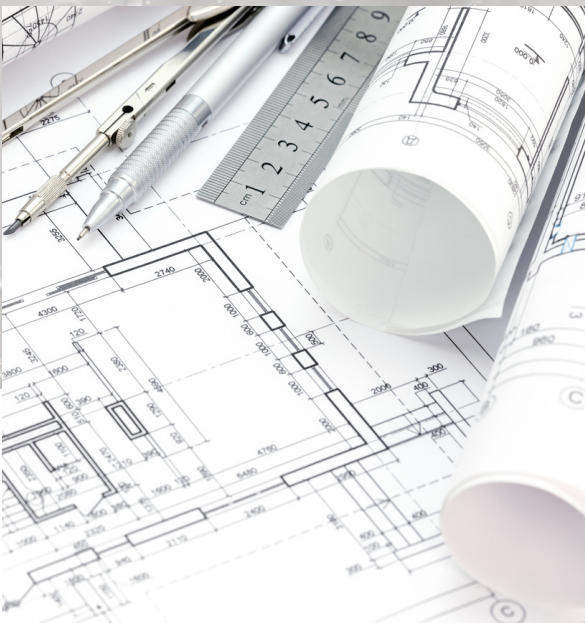

BITUMEN PRIMER

Product Description

BITUMEN PRIMER

Product Description

One component, solvent – based bitumen priming and sealing solution.

Benefits

- Ready to use
- Quick drying
- Applied by brush, roller, or airless spray.
- Deep penetration ability into concrete and mortar substrates.
- Excellent adhesion of solvent free bituminous coatings and membranes

Colour	Black
Size(s) & Packaging	5L & 20L metal drums
Coverage	4-5 m ² per 1 litre ^[1]
Penetration Depth	2 mm ^[2]
Density	0.9 kg/l
Solid content by volume	~20% by vol.
Chemical Base	Solvent based bitumen solution
Viscosity	13 -16 sec. ford 4 Cup
Volatile organic compound content	~80% by vol.
Substrate / Ambient air Temp.	+5°C min / +35°C max.
Drying time	4 -6 hours
Storage	Keep container unopened and in original packaging. Dry conditions - +5°C to 35°C
Shelf Life	12 months



Application Information

Preparation

All surfaces should be sound, clean and DRY.

Apply a generous coat of Bitumen Primer using a brush or roller. Allow surface to dry fully before application of any additional coatings.

- For use on porous and non-porous surfaces
- Ready to use. Do not dilute.
- Do not apply on damp substrates.
- Using a flat paddle, mix well before use.
- All surfaces should be sound, clean and DRY.
- Apply bitumen primer using a brush or roller. Allow surface to dry fully before application of any additional coatings.

Mixing

Before use, ensure that the Bitumen Primer is thoroughly mixed into a homogeneous mix.

Spray Application

Use airless spray equipment for high viscous liquids with a feed pressure of 4 ~bar.

Pressure at gun ~ 2.5 bar

Do not mix the product with other materials.

Brush / Roller Application

~0.20l/m² for typical concrete surfaces. The spread rate will vary according to the substrate porosity.

Limitations

Do not apply Bitumen primer whilst smoking or near naked flames.

Do not apply Bitumen primer during rain and should be applied in a ventilated area.

Protect coated area from rain, frost etc until dry

Health and Safety

Avoid spillage onto patios, paths etc; flush away any spillage immediately using concentrated detergent solution.

Do not contaminate glass or aluminium; wipe off any material immediately.

For full safety information consult material data sheet – available on request.



Other information

Information given is in good faith based on experience and usage, however all recommendations are made without warranty or guarantee, since the conditions of use are beyond our control. All goods are sold in accordance with our Conditions of Sale, copies of which are available on request. Customers are advised that products, techniques and codes of practice are under constant review and changes occur without notice; please ensure you have the latest updated information



Address: APD Industrial Park
Cnr Elsecar & Bernie streets
Kya Sand
Johannesburg
2163



011 7083603



technical@safeguardchem.co.za



www.safeguardchem.co.za



[Safeguardchemicals](https://www.facebook.com/Safeguardchemicals)



[safeguardchemicals](https://www.instagram.com/safeguardchemicals)



[safeguard.chemica](https://www.tiktok.com/safeguard.chemica)



[safeguardchemicalssa2888](https://www.youtube.com/safeguardchemicalssa2888)



[safeguard.chemica](https://www.linkedin.com/safeguard.chemica)